

YOM4/24D2006模块——2A 60V Opto-MOS module


概述 Features

- 4合1光MOS继电器模块 4 in 1 Opto-MOS module
- 负载电流至2A Load current up to 2A
- 击穿电压60V Breakdown voltage 60V
- 带工作状态显示 Operating display
- 介质耐压3000V Dielectric strength 3000V
- 带导轨快连接安装卡扣 Rail fast mount
- 快连接接线端子 Quick-connect terminal



应用 Applications

- 工业控制 Industrial control

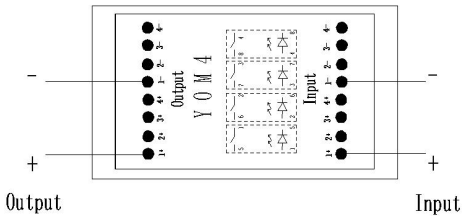

打印标志 Marking information

Part number	Package	Marking
YOM4/24D2006	导轨快速安装	YOM4 24D2006



极限值 Absolute maximum ratings (单个SSR)

(Ta=25℃)

特性参数/Parameter		符号 /Symbol	测试条件/Test condition	最小值 /Min.	典型值 /Typ.	最大值 /Max.	单位 /Unit
输入端 /Input	工作电压/Operating voltage	V_{in}		19	24	28.8	V
	击穿电压/Breakdown voltage	BV_{DSS}		60			V
输出端 /Output	额定电流/On-state current	I_L	$V_{in}=24V$			2	A
	峰值电流/Peak current	I_{peak}	10ms		2.8		A
介质耐压/I/O Dielectric strength *		V_{ISO}	$I_{ISO} \leq 0.3mA$	3000			V_{rms}
工作温度/Operating temperature		T_{opr}		-30		85	℃
储存温度/Storage temperature		T_{stg}		-40		125	℃

“*”：RH=40 to 60%, T=20~30℃, AC for 1 minute.


电参数 **Electrical parameters** （单个SSR）

(Ta=25℃)

特性参数/Parameter		符号 /Symbol	测试条件 /Test condition	最小 值 /Min.	典型值 /Typ.	最大值 /Max.	单位 /Unit
输入端/Input	输入电流/Input current	I_{in}	$V_{in}=V_{in}+20\%$		14	18	mA
输出端/Output	断态泄漏电流/Output off-state leakage current	I_{Leak}	$V_o=60V$			10	μA
耦合特性 /Transfer characteristics	接通电压/Turn on voltage	V_{on}			5	18	V
	关断电压/Must release voltage	V_{off}		1.2			V
	导通电压降/Output on-state voltage drop	V_T	$V_{in}=24V, I_L=1A,$ $V_b=6V$			0.1	V
	导通时间/Turn on time	T_{on}	$V_{in}=24V, I_L=600mA,$ $V_b=6V$			4	ms
	关断时间/Turn off time	T_{off}	$V_{in}=24V, I_L=600mA,$ $V_b=6V$			4	ms

外形尺寸 **Outline dimension :mm**

YOM4/24D2006

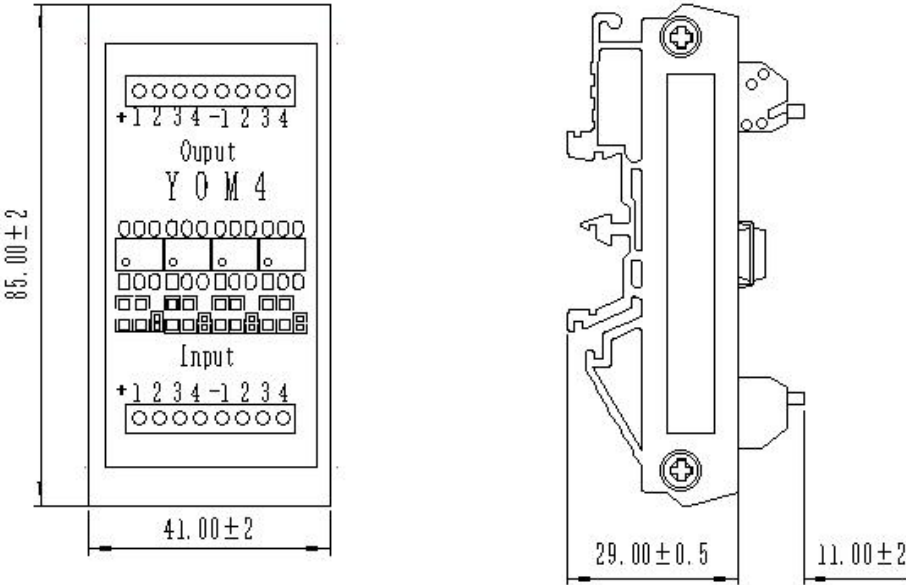


订货信息 **Ordering information**


订货信息/Ordering information						
	Y	OM	4	24D	200	6
公司商标代号 Company symbol						
MOS 直流输出 SSR: MOS DC Output SSR						
控制电路数 Number of control circuits:			4: 4 组			
输入电压 Input voltage: 24Vdc						
负载电流 Load current: 200--2A						
击穿电压 BV _{DSS} : 6-60V						

特性曲线 **Characteristic data**


1. 负载电流与环境温度关系曲线
Load current VS. ambient temperature

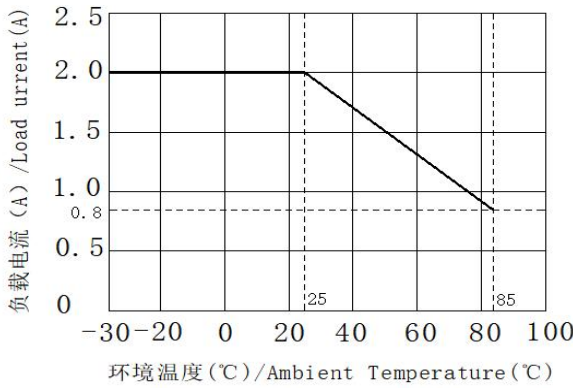

接通和关断时间关系 **Turn on and turn off time**

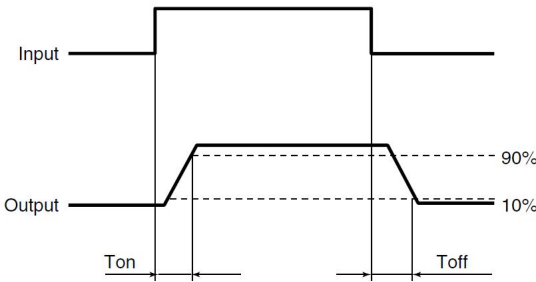

接线图 Wiring diagram

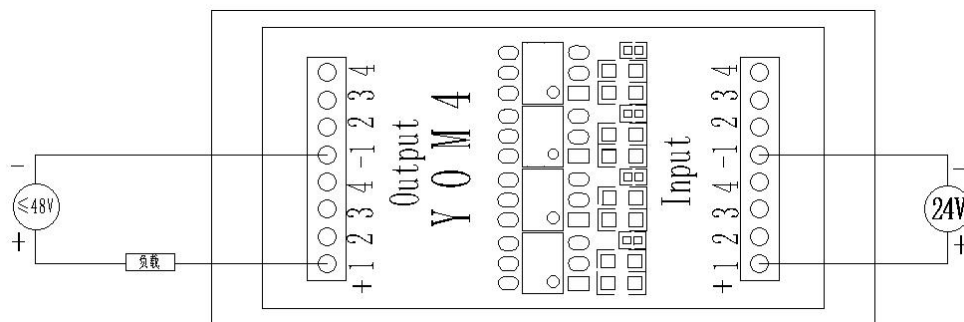

注意事项 Notes

- a) 工作环境温度超过 25℃时请降额使用。参见特性曲线 1。

When ambient temperature is above 25℃, the load current must be reduced. (see characteristic data)

- b) 继电器接线时，务必保证输入端极性的正确，以免损坏继电器。

Ensuring the polarity is correct when connecting the input lines, otherwise the wrong connection will damage the relay.

关于防静电对策 Cautions for static electricity

- a. 操作 MOS 输出继电器的作业人员，请穿戴防静电工作服，通过 500kΩ~1MΩ 左右的保护电阻，实施人体接地。

a. Employees handling relays should wear anti-static clothes and should be grounded through protective resistance of 500kΩ to 1MΩ.

- b. 请在作业台上装有带导电性的金属板或具有防静电的专用板，并对测量仪器和治具等实施接地。

b. A conductive metal sheet should be placed over the work table. Measuring instruments and jigs should be grounded.

- c. 组装时使用的设备等也应正确的接地。

c. Devices and equipment used in assembly should also be grounded.

- d. 对印刷电路板和机器进行包装时，请避免使用发泡苯乙烯、聚乙烯等带电性的高分子材料。

d. When packing printed circuit boards and equipment, avoid using high-polymer materials such as foam styrene, plastic, and other materials which carry an electrostatic charge.

- e. 对 MOS 输出继电器进行储存和搬运时，请在不易产生静电的环境(例如湿度 45~60%)中通过导电性包装材料进行保护。

e. When storing or transporting relays, the environment should not be conducive to generating static electricity (for instance, the humidity should be between 45 and 60%), and relays should be protected using conductive packing materials.