

## YAS1/D1.2P22——1.2A 700V SSR

### 概述 Features

- 调相型 Non zero-cross
- 负载电流至1.2A Load current up to 1.2A
- 阻断电压700V Repetitive peak off-state voltage 700V
- 介质耐压4000V Dielectric strength 4000V
- 符合RoHS RoHS compliant

### 获得认证 Agency approvals



- UL - E481250
- cUL - E481250
- TUV - R 50466012

### 应用 Applications

- 家电产品（空调、冰箱、洗衣机、微波炉、卫浴等）  
Home appliances (air conditioners, refrigerators, washing machines, microwave ovens, personal hygiene product etc.)
- 工业控制 Industrial control

### 打印标志 Marking information

Part number	Package	Marking
YAS1/D1.2P22	DIP7	YAS1 D1.2P22
YAS1/D1.2P22S	SMD7	YAS1 D1.2P22



### 极限值 Absolute maximum ratings

(Ta=25°C)

特性参数/Parameter		符号/Symbol	测试条件/Test condition	最小值/Min.	典型值/Typ.	最大值/Max.	单位/Unit
输入端/Input	LED 反向电压/LED reverse voltage	V <sub>r</sub>		6			V
	LED 正向电流/LED forward current	I <sub>f</sub>				50	mA
输出端/Output	阻断电压/Repetitive peak off-state voltage	V <sub>DRM</sub> /V <sub>RDM</sub>		700			V
	额定电流/On-state RMS current	I <sub>T(RMS)</sub>	I <sub>in</sub> =10mA			1.2	A
	浪涌电流/ Surge current	I <sub>TSW</sub>	50Hz, 1 cycle		12		A
介质耐压 /Dielectric strength *		V <sub>ISO</sub>	I <sub>ISO</sub> ≤0.3mA	4000			V <sub>rms</sub>
工作温度/Operating temperature		T <sub>opr</sub>		-30		85	°C
储存温度/Storage temperature		T <sub>stg</sub>		-40		125	°C

\* : RH =40 to 60%, T=20~30°C, AC for 1 minute.


## 电参数 Electrical parameters

(Ta=25°C)


特性参数/Parameter		符号/Symbol	测试条件/Test condition	最小值/Min.	典型值/Typ.	最大值/Max.	单位/Unit
输入端/Input	LED 正向电压 /LED forward voltage	V <sub>f</sub>	I <sub>f</sub> =10mA		1. 2	1. 3	V
	LED 反向电流/LED reverse current	I <sub>R</sub>	V <sub>R</sub> =5V			10	μA
输出端/Output	断态泄漏电流/Output off-state leakage current	I <sub>DRM</sub>	V <sub>DRM</sub> =700V			10	μA
	断态泄漏电流/Output off-state leakage current	I <sub>RRM</sub>	V <sub>RRM</sub> =700V			10	μA
	维持电流 /Holding current	I <sub>H</sub>				50	mA
	电压指数上升率 /Critical rate of rise of off-state voltage	dv/dt	V <sub>DRM</sub> =600V*1/√2	200			V/μs
耦合特性 /Transfer characteristics	LED 触发电流/LED trigger current	I <sub>TR</sub>			3	8	mA
	推荐的工作电流 /Recommend operating current	I <sub>in</sub>		10		18	mA
	导通电压降 /Output on-state voltage drop	V <sub>T</sub>	I <sub>in</sub> =10mA, I <sub>L</sub> =1. 2A V <sub>D</sub> =6V		1. 1	1. 5	V
	导通时间/Turn on time	T <sub>on</sub>	I <sub>in</sub> =10mA, V <sub>D</sub> =6V, R <sub>L</sub> =100Ω		0. 01	1	ms
	关断时间/Turn off time	T <sub>off</sub>				1+1/2cycle	ms

## 外形尺寸 Outline dimension :mm

### 1、DIP7

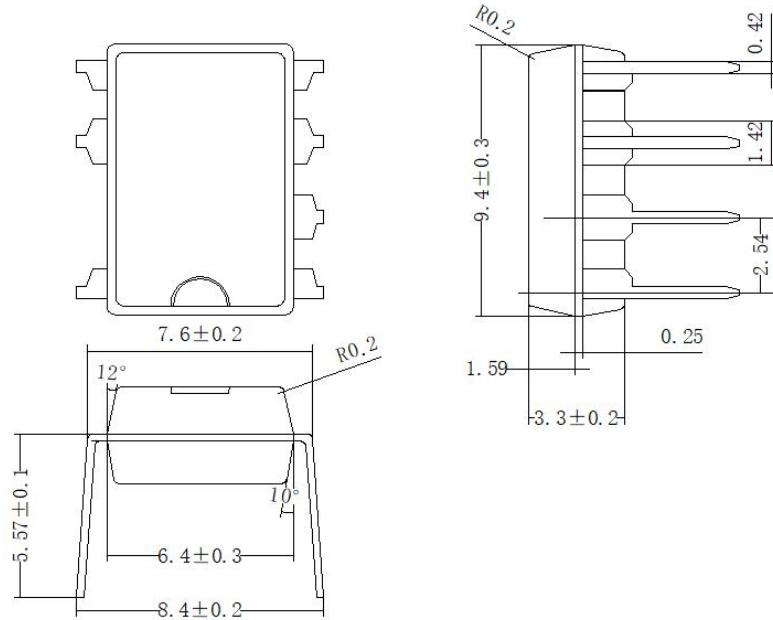

### 2、SMD7

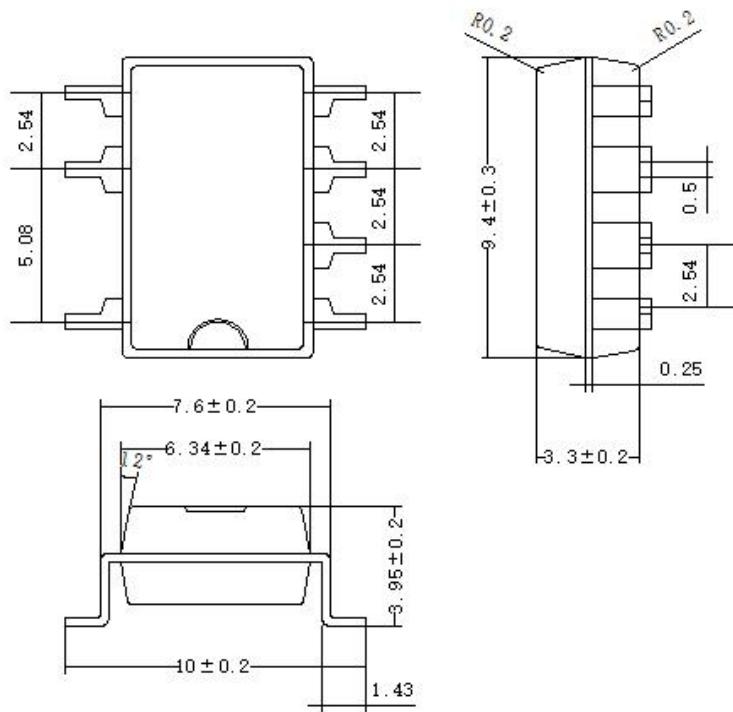

注：未注公差为±0.05mm。


## 订货信息 Ordering information

订货信息/Ordering information								
	Y	AS	1/	D	1.2	P	22	D/S
公司商标代号 Company symbol								
交流输出型 AC SSR								
封装 Package: 1: DIP7								
输入端电流型 Current driving: D								
负载电流 Load current: 0.6—0.6A;1.2—1.2A								
P:调相型 Non zero-cross Z:过零型 Zero-cross								
负载电压 Load voltage: 22:220Vac;38:380Vac								
D:DIP(Nil) S :SMD								

## 包装信息 Package specification


### DIP7:

每管最多装50个/MAX. 50pcs of products shall be packaged in a sleeve;  
每盒最多装40条/MAX. 40 sleeves in one case.

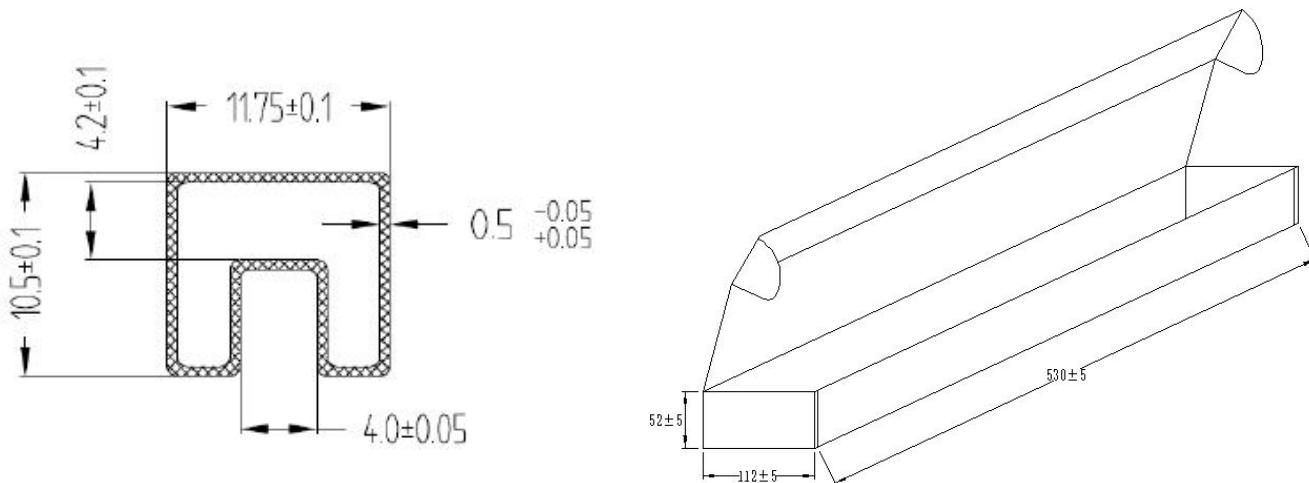

### SMD7:

每管最多装50个/MAX. 50pcs of products shall be packaged in a sleeve;  
每盒最多装30条/MAX. 30 sleeves in one case.

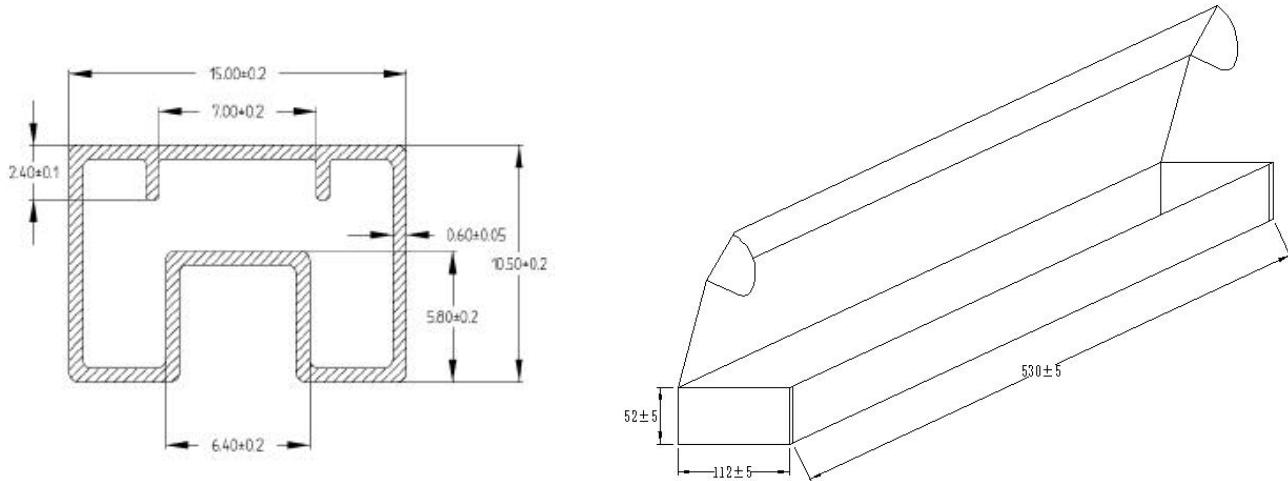


### 安规要求 Safety and insulation ratings

爬电距离	Creepage distance	5.0mm, CTI $\geq 275$ ;
瞬时过电压	Highest allowable overvoltage	5000V;
再现峰值电压	$V_{IORM}$	769V;
局部放电	Partial discharge test voltage: method b, $V_{pd} = V_{IORM} \times 1.6$	1230V.

### 特性曲线 Characteristic data


#### 1. 负载电流与环境温度关系曲线

Load current VS. ambient temperature

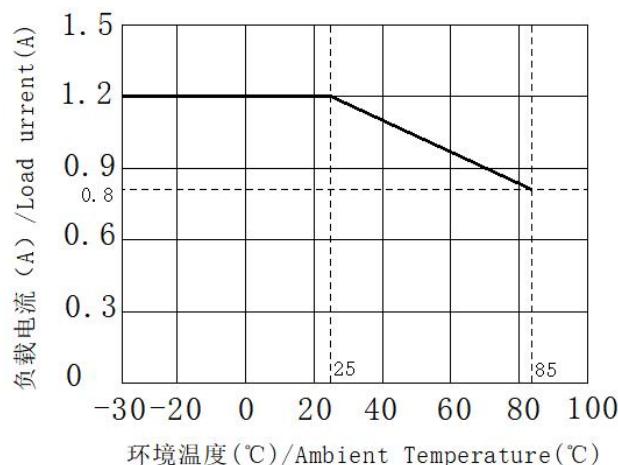


## 2. 导通压降—环境温度特性

On-state voltage drop VS. ambient temperature

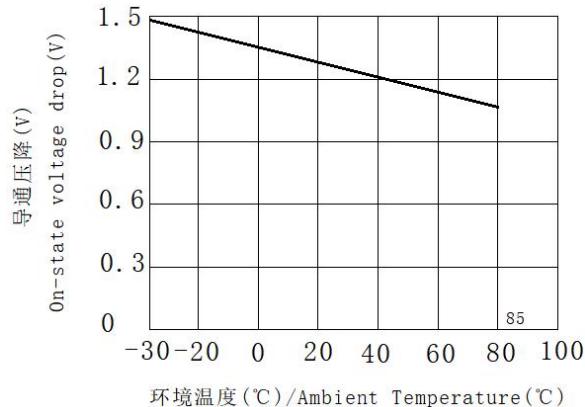


## 3. LED触发电流—环境温度特性

Trigger LED current VS. ambient temperature

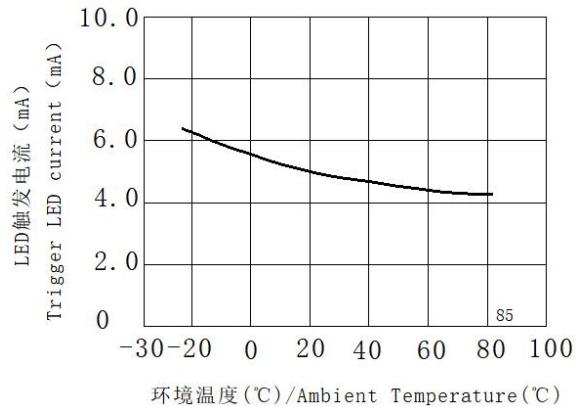


## 4. LED 导通压降—环境温度特性

LED dropout voltage vs. ambient temperature  
LED current: 10 to 50 mA

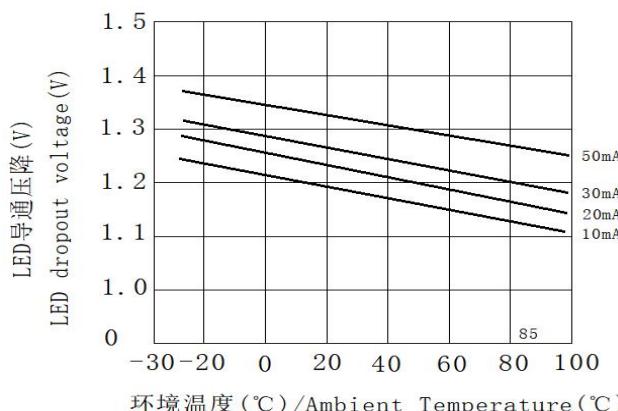


## 5. 导通时间—LED 电流特性


Turn on time vs. LED current

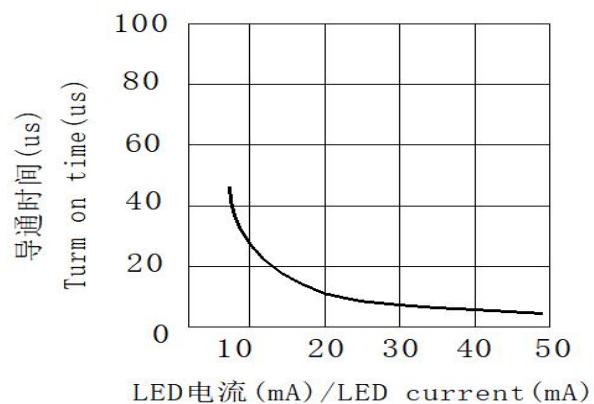

## 接通和关断时间关系 Turn on and turn off time

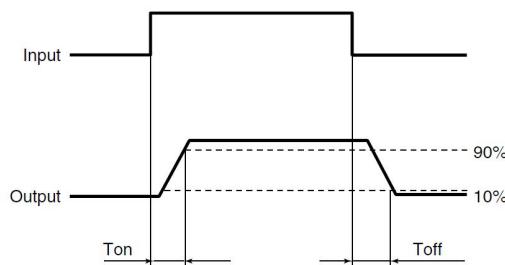

## 接线图 Wiring diagram

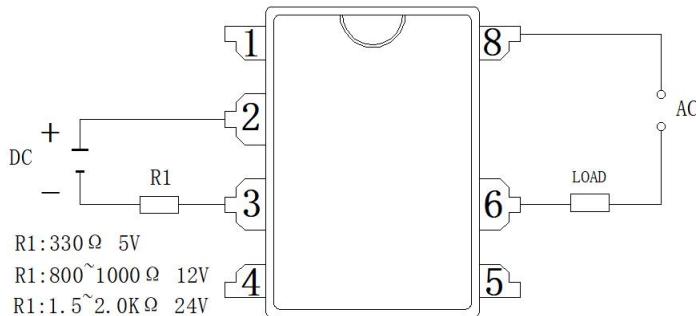

## 注意事项 Notes

- a) 工作环境温度超过 25℃时请降额使用。参见特性曲线 1。


When ambient temperature is above 25°C, the load current must be reduced. (see characteristic data )

- b) 继电器接线时，务必保证输入端极性的正确，以免损坏继电器。

Ensuring the polarity is correct when connecting the input lines, otherwise the wrong connection will damage the relay.


- c) 由于 SSR 动作时间很短，输入端的噪声可能会引起 SSR 误动作，所以在输入端环境噪声较大时，应在输入端接 R/C 回路吸收噪声。

Since the operate time of the relay is extremely short, any noise to input terminal will cause malfunction of the SSR, So a RC circuit should be connected to input terminal to absorb the noise in the noisy condition.

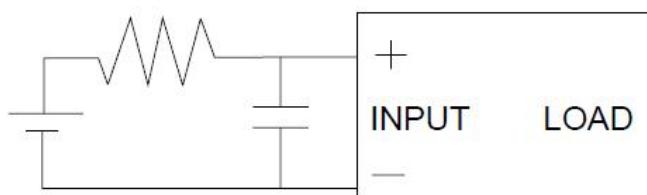

- d) 推荐的使用电路，输出端的尖峰电压可能会引起 SSR 误动作，所以请在输出端应加 R/C 回路或压敏电阻吸收尖峰电压，具体见下图：

Below shows a recommend circuit: Please add a RC circuit or varistor on the load side, as noise/surge could damage the unit or cause malfunctions.

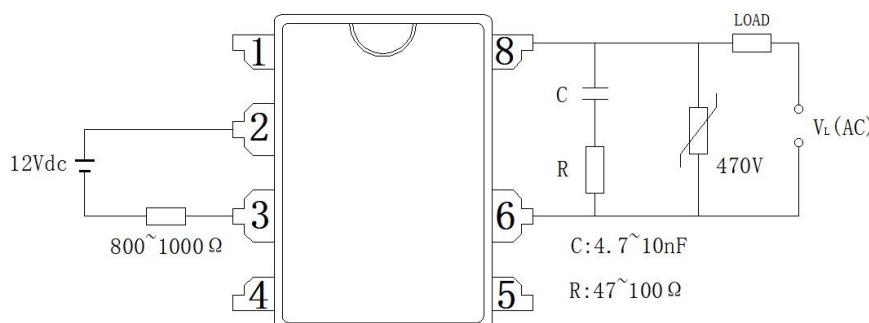

## 关于防静电对策 **Cautions for static electricity**

- a. 使用电烙铁时, 对电烙铁前端进行接地。(建议使用低电压用的电烙铁。) When using soldering irons, either use irons with low leakage current, or ground the tip of the soldering iron. (Use of low-voltage soldering irons is also recommended.)
- b. 组装时使用的设备等也应正确的接地。Devices and equipment used in assembly should also be grounded.

## 关于焊接 **Soldering**

继电器焊接, 260°C 情况下焊接时间不能超过 10 秒钟, 350°C 情况下焊接时间不能超过 5 秒钟。  
Soldering must be completed within 10 seconds at 260°C or within 5 seconds at 350°C.